

## LED Tubular Work Light LED M9R

### Introduction:

1. LED M9R is designed for harsh environment.
2. Using anodized aluminum lamp body and tempered glass.
3. IP67 rating, resistant to high pressure wash, coolants and detergents.
4. High brightness SMD2835 LED chip, 120lm/w.
5. Frosted cover available to decrease glare.
6. Easy to install and control the lighting direction.
7. Variety input voltages optional: AC90-240V 50/60Hz, AC/DC12V, AC/DC24V.


### Application:

CNC machine work: engraving machine, EDM machine etc.  
 Assembly and repair work.  
 Laboratories.

**Warranty:** 2 years


**Certification:** CE, RoHS, TUV, FCC, UL

### Dimension(mm):

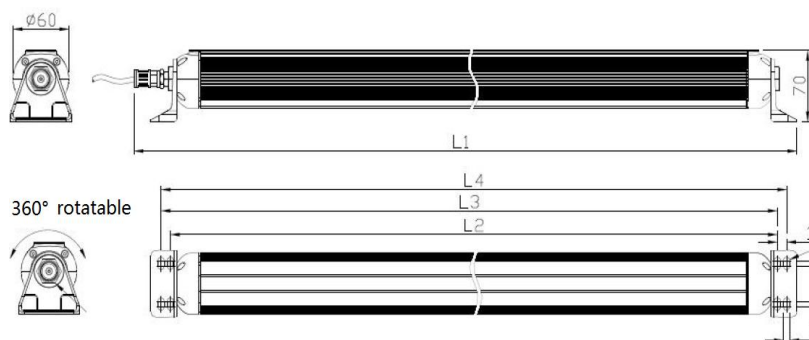

	300S	400S	600S	800S
L1	375	515	715	915
L2	335±3	475±3	675±3	875±3
L3	325±3	465±3	665±3	765±3
L4	315±3	455±3	655±3	755±3



### Ordering code:

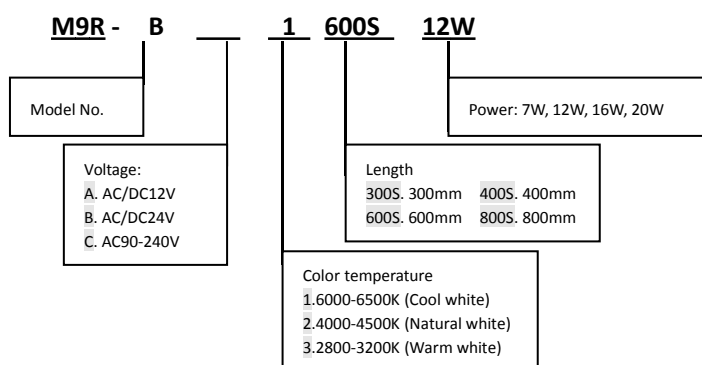

### Parameter:


Power(length)	7W(300mm), 12W(400mm), 16W(600mm), 20W(800mm)
Input voltage(current)	AC90-240V(50/60Hz), AC/DC24V, AC/DC12V
Lumen efficiency	120lm/w
CRI	>80
IP rating	IP67
Beam angle	110 degree
Color temperature	2800-3200K, 4000-4500K, 6000-6500K
Material	Aluminum housing, Tempered glass
Lifetime	50,000 hours
Working temperature/ humidity	-20~45℃ / 10%-90%
Storage temperature/ humidity	-40~60℃ / 10%-90%
Installation	Fixed by brackets

Light distribution data (16W)

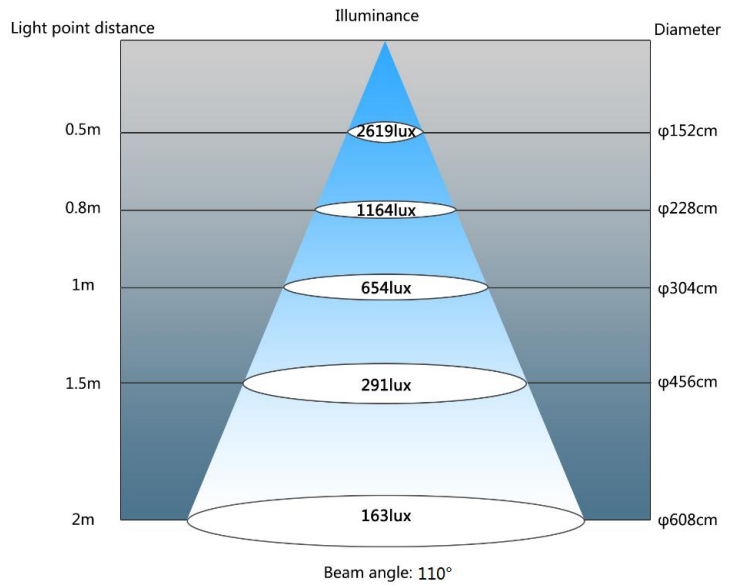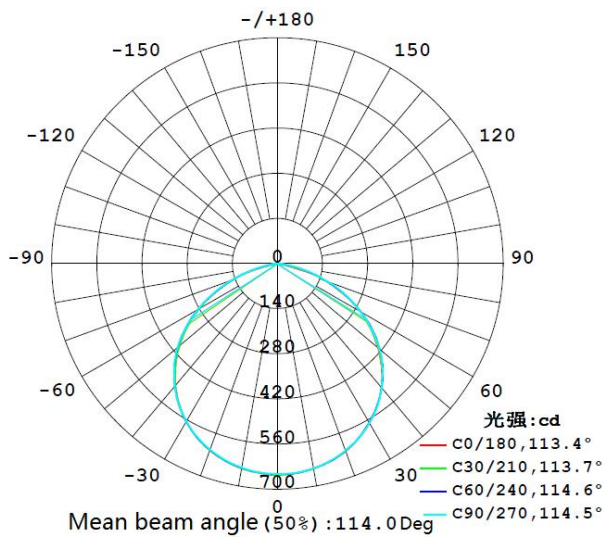


Wire connection:

24V cable

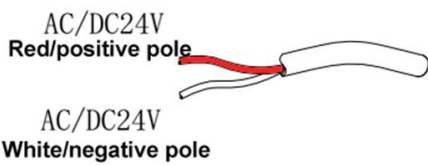

AC100-240V Cable

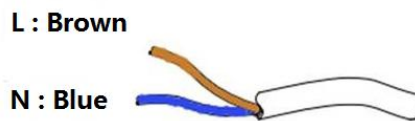

Package info

	300S	400S	600S	800S
Qty/carton	24pcs/carton	12pcs/carton	12pcs/carton	9pcs/carton
Carton Size	L780*W340*H233mm	L580*W340*H233mm	L780*W340*H233mm	L980*W260*H233mm
Net Weight	13.2kg	8.9kg	12.7kg	11.4kg
Gross Weight	16kg	11kg	16kg	13.9kg

